

Population range: 100 persons
Measures: 980 x 290 x 245 cm(l,w,h)
Area Requirement: 42m²
Sludge treatment: Sludgestabilization
Max. organic loading: 6,00 kg/day
Max. average daily flow: 15,00 m³/day
Max. blower power consumption: 1,3 KW
Weight (total/plug&play): 17,96 to
Total capacity: 40m³

Total capacity: 40m³

shaft optional!
(height can be adjusted by choosing different concret shaft rings)

30

0,00

Inlet
KG DN160



-215

95

125

0,00

Outlet
KG DN 160

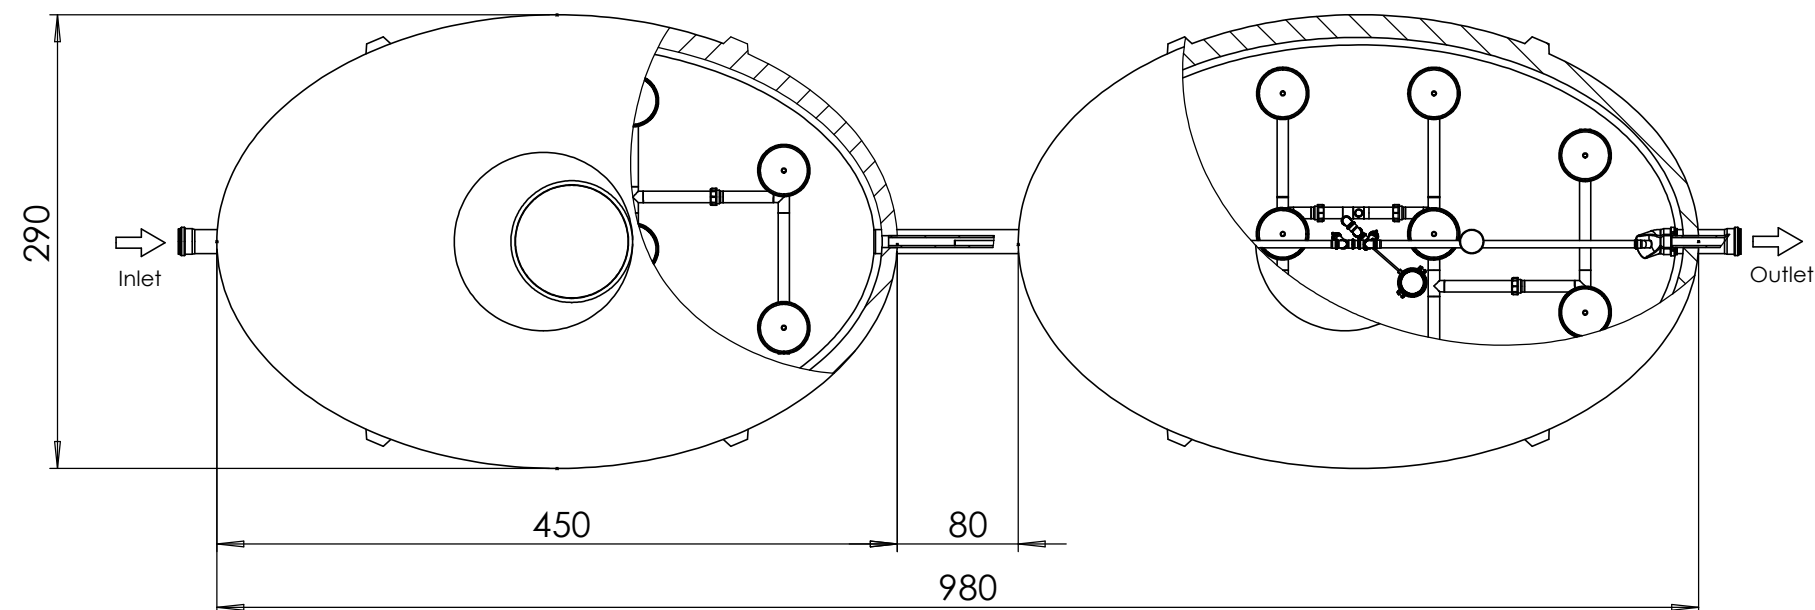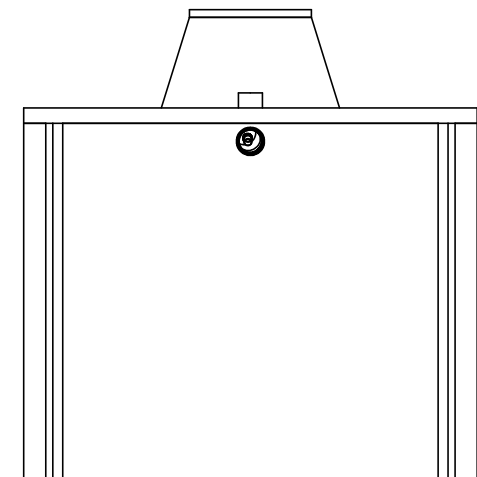


Outer Container optional!

Power

Magnet Valve Distributor

Compressor

M 1:100

						Material		
					DATE	NAME	Scale: 1:50	DIN A3
				dra.	25.01.2023	mgr	Part-No.:	
				chek.			Description:	
							QuickONE+ 100 PE One Chamber SBR	
Rev.	Change	Date	Name	File: oBeton_QuickONE-WWTP_100pe				Page 1 / 1